

## FROST PROTECTION / PUMP HOUSE HEATER

The ideal frost protection solution for moist or cold environment applications where equipment needs to stay above freezing. Featuring corrosion-resistant construction, the steel housing protects the tubular stainless steel element. Low watt density reduces surface temperature, and a built-in safety shutoff makes it perfect for low-clearance locations like crawlspaces. A large wiring compartment makes installation in tight locations simple and quick.

### BENEFITS

- Stainless steel sheathed element(s) with aluminum fins are corrosion resistant
- Painted steel corrosion-resistant housing
- Built-in adjustable dial thermostat control for freeze protection



### APPLICATIONS

Pump Houses | Boiler Rooms | Garages | Grease Pits | Residential / Farm Pump House Systems | Equipment Buildings | Crawlspaces


### SPECIFICATIONS

Voltage	120V and 240 / 208V
Wattage	Sizes ranging from 375 to 1000 W
Color	Black
Finish	Powder coating resists fading and abrasion
Construction	The heater and control enclosure feature heavy, 20-gauge, corrosion-resistant steel
Heating Element	Stainless steel sheathed element (1000 watt model includes two elements), are corrosion resistant with aluminum fins. Low watt density design achieves a wider distribution of heat at lower surface temperature.
Control	Built-in adjustable thermostat (4° to 30°C / 40° to 85°F) with freeze protection setting and an additional no heat setting that prevents heater from operating in off season
Warranty	2-year warranty on complete unit

### ORDERING GUIDE

Part	Model	Watts	BTU	Volts	Weight (kg/lbs.)
30101	FP051TB	500	1710	120	3.6 / 8
30102	FP052TB	500 / 375	1710 / 1280	240 / 208	3.6 / 8
30103	FP102TB	1000 / 750	3415 / 2560	240 / 208	4.3 / 9.5

### DIMENSIONS

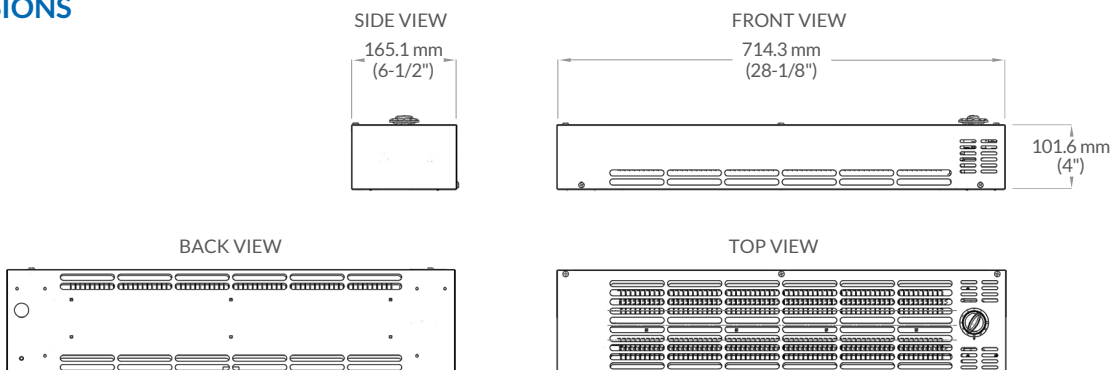

Commercial / Industrial