

2021 US Heat Catalog



Table of Contents

Fan-forced Heaters	1
Apex72*	2
Com-Pak™ Series	3-4
Com-Pak™ Max Series	5
Com-Pak™ Bath Series.....	6
Com-Pak™ Twin Series.....	7
Energy-Plus™	8
NLW Series	9
RBF	10
Register.....	11-12
RFI Series	13
Baseboards	14
F Series.....	15
Portable Baseboard.....	16
SoftHEAT™	17
SoftHEAT™ Portable.....	18
Linear Convactor Baseboards.....	19
Proportional Convactor Baseboards	20
Panel Convectors	21
Allegro II Series	22
Apéro Series	23
Specialty	24
Under Cabinet Heater.....	25
Pump House Heater	26
Cove Heater	27
Ceiling-mounted Heater	28
Industrial Unit Heater.....	29
Garage/Workshop Heater.....	30
Construction/Unit Heaters	31
Thermostats*	32-33
Outdoor Heat	34
DLW Series.....	35
DIR Series	36
DIRP	37
DSH.....	38
DGR Series	39
Cadet Part Number Index	40-41

Fan-forced Heaters



Find the right fit for you - fan-forced heaters are great heating solutions for residential and commercial areas including laundry rooms, vestibules, bathrooms, and even large foyers. Although all electric heat is 100% efficient, you will see some energy savings with a fan-forced heater because it takes very little time to heat a room. Fan-forced heaters circulate the air throughout the room which results in the space warming much quicker than with other room heaters. For versatility and efficiency, choose fan-forced heat.

Apex72*

Fan-forced Heaters

High Installation


Gain up to 9 extra square feet of living space with higher placement on the wall

Contemporary Look

Blend seamlessly into any room

Safe

Includes high temperature safety shutoff feature

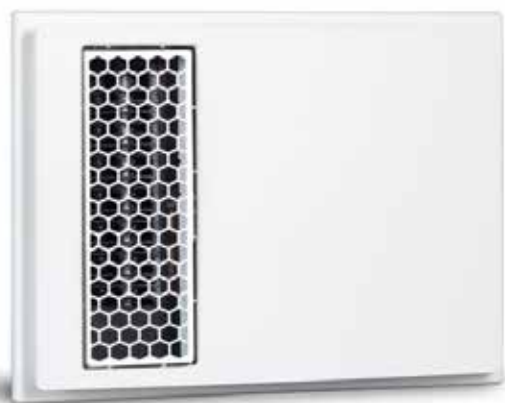

Product Dimensions (WxHxD)
12" x 8-1/2" x 4"
30.5 cm x 21.6 cm x 10.2 cm



Heater assemblies come complete with orient ring, wall can and a decorative cover. A required electronic thermostat is sold separately.

*Sales restrictions apply

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
HW051	500	120	4.2	1710	4.7 / 2.1
HW101	1000	120	8.3	3415	4.7 / 2.1
HW151	1500	120	12.5	5120	4.7 / 2.1
HW052	500	240	2.1	1710	4.7 / 2.1
HW082	800	240	3.3	2730	4.7 / 2.1
HW102	1000	240	4.2	3415	4.7 / 2.1
HW132	1300	240	5.4	4440	4.7 / 2.1
HW038	375	208	1.8	1280	4.7 / 2.1
HW058	525	208	2.5	1795	4.7 / 2.1
HW078	750	208	3.6	2560	4.7 / 2.1
HW108	1000	208	4.8	3415	4.7 / 2.1
HW128	1200	208	5.8	4095	4.7 / 2.1
HW168	1600	208	7.7	5460	4.7 / 2.1
HW162	1600 / 1200	240 / 208	6.7 / 5.7	5460 / 4095	4.7 / 2.1

Accessories (sold separately)

Model	Description
CC	Galvanized wall can, single
CC10	Galvanized wall can, 10-pack
CCSMW	Surface mount wall can, white
CCSMB	Surface mount wall can, black
ACL	Decorative cover with louver outlet grille, single
ACL5	Decorative cover with louver outlet grille, 5-pack
ACH	Decorative cover with hexagonal outlet grille, single
ACH5	Decorative cover with hexagonal outlet grille, 5-pack
OR	Orient ring, single
OR10	Orient ring, 10-pack

Com-Pak™ Series

Fan-forced Heaters

Thermostat

Available with or without built-in thermostat

Built-in Overheat Protection

Includes high temperature safety shutoff for complete peace-of-mind

Quality

A strong galvanized wall can recesses into the wall and is paired with a grille that is powder-coated to remove sharp edges and provide a durable, corrosion-resistant finish



Complete Units (includes wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CSC101T	1000	120	8.3	3415	7 / 3.2
CSC151T	1500	120	12.5	5120	7 / 3.2
CSC102T	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	7 / 3.2
CSC152T	1500 / 1125	240 / 208	6.3 / 5.4	5120 / 3840	7 / 3.2
CSC202T	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	7 / 3.2
CSC101*	1000	120	8.3	3415	7 / 3.2
CSC151*	1500	120	12.5	5120	7 / 3.2
CSC072*	750 / 563	240 / 208	3.1 / 2.7	6825 / 5120	7 / 3.2
CSC102*	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	7 / 3.2
CSC152*	1500 / 1125	240 / 208	6.3 / 5.4	5120 / 3840	7 / 3.2
CSC202*	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	7 / 3.2

*Units do not have a built-in thermostat
Suffix W or A in model number designates color

See next page for heater assemblies and accessories

Product Dimensions (WxHxD)
9" x 12" x 4"
22.9 cm x 30.5 cm x 10.2 cm

Thermostat

Available with or without built-in thermostat

Built-in Overheat Protection

Includes high temperature safety shutoff for complete peace-of-mind

Quality

A strong galvanized wall can recesses into the wall and is paired with a grille that is powder-coated to remove sharp edges and provide a durable, corrosion-resistant finish



Heater Assemblies (requires wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CS051	500	120	4.2	1719	3.5 / 1.5
CS101	1000	120	8.3	3415	3.5 / 1.5
CS151	1500	120	12.5	5120	3.5 / 1.5
CS058	563	208	2.7	1925	3.5 / 1.5
CS078	750	208	3.6	2560	3.5 / 1.5
CS108	1000	208	4.8	3415	3.5 / 1.5
CS118	1125	208	5.4	3840	3.5 / 1.5
CS158	1500	208	7.2	5120	3.5 / 1.5
CS208	2000	208	9.6	6825	3.5 / 1.5
CS052	500 / 375	240 / 208	2.1 / 1.8	1710 / 1280	3.5 / 1.5
CS072	750 / 563	240 / 208	3.1 / 2.7	2560 / 1925	3.5 / 1.5
CS102	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	3.5 / 1.5
CS122	1250 / 937	240 / 208	5.2 / 4.5	4265 / 3200	3.5 / 1.5
CS152	1500 / 1125	240 / 208	6.3 / 5.4	5120 / 3840	3.5 / 1.5
CS202	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	3.5 / 1.5

Add suffix T to model to add a thermostat

Accessories (sold separately)

Model	Description
CTT1W CTT1A	Single pole built-in thermostat kit, white Single pole built-in thermostat kit, almond
CTT2W CTT2A	Double pole built-in thermostat kit, white Double pole built-in thermostat kit, almond
CTT1P CTT2	Single pole built-in tamperproof thermostat kit Double pole built-in tamperproof thermostat kit
CC CC10	Galvanized wall can, single Galvanized wall can, 10-pack
CCSMB CCSMW CCSMA	Surface mount wall can, black Surface mount wall can, white Surface mount wall can, almond
CGW CGW10	Vertical grille kit, white, single Vertical grille kit, white, 10-pack
CGA CGA10	Vertical grille kit, almond, single Vertical grille kit, almond, 10-pack
CGB CGB10	Vertical grille kit, black, single Vertical grille kit, black, 10-pack
CMGW CMGW5	Horizontal grille kit, white, single Vertical grille kit, white, 5-pack
CMGA CMGA5	Horizontal grille kit, black, single Horizontal grille kit, black, 5-pack
CAMW CAMA	Adapter plate, 18-1/2" W x 22" H, white Adapter plate, 18-1/2" W x 22" H, almond
SAMW SAMA	Adapter plate, 12" W x 21-14" H, white Adapter plate, 12" W x 21-14" H, almond

Com-Pak Max Series

Fan-forced Heaters

Thermostat

Available with or without built-in thermostat

Versatile Installation

Install horizontally or vertically to fit any application

Quality

A strong galvanized wall can recesses into the wall and is paired with a grille that is powder-coated to remove sharp edges and provide a durable, corrosion-resistant finish



Horizontal Installation
Product Dimensions (WxHxD)
8" x 10-1/8" x 4"
20.3 cm x 25.7 cm x 10.2 cm



Vertical Installation
Product Dimensions (WxHxD)
10-1/8" x 8" x 4"
25.7 cm x 20.3 cm x 10.2 cm

Heater assemblies come complete with a wall can and grille kit, may require a thermostat

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CM158*	700 / 800 / 1500	208	3.4 / 3.8 / 7.2	2390 / 2730 / 5120	5 / 2.3
CS198*	400 / 700 / 1100 / 1500 / 1900	208	1.9 / 3.4 / 5.3 / 7.2 / 9.1	1710 / 2730 / 4095 / 5120 / 6825	4.8 / 2.2
CM198T	400 / 700 / 1100 / 1500 / 1900	208	1.9 / 3.4 / 5.3 / 7.2 / 9.1	1710 / 2730 / 4095 / 5120 / 6825	5 / 2.3
CM152*	700 / 800 / 1500	240	2.9 / 3.3 / 6.3	2390 / 2730 / 5120	4.3 / 1.9
CM152T	525 / 600 / 1125	208	2.5 / 2.9 / 5.4	1790 / 2045 / 3840	4.5 / 2
CM192*	400 / 700 / 1100 / 1500 / 1900	240	1.7 / 2.9 / 4.6 / 6.3 / 7.9	1365 / 2390 / 36755 / 5120 / 6485	4.3 / 1.9
CM192T	300 / 525 / 825 / 1125 / 1425	208	1.4 / 2.5 / 4.0 / 5.4 / 6.9	1025 / 1790 / 2815 / 3840 / 4860	4.5 / 2

*Units do not have a built-in thermostat

Accessories (sold separately)

Model	Description
CC / CC10	Galvanized wall can - single / 10 pack
CCSMB / CCSMW / CCSMA	Surface mount wall can - black / white / almond
CGW / CGW10 CGB / CGB10 CGA / CGA10	Vertical grille kit, white - single / 10 pack Vertical grille kit, black - single / 10 pack Vertical grille kit, almond - single / 10 pack
CMGW / CMGW5 CMGA / CMGA5	Horizontal grille kit, white - single / 5 pack Horizontal grille kit, almond - single / 5 pack
CTT1W / CTT2W	Built-in thermostat kit, white - single pole / double pole
CTT1A / CTT2A	Built-in thermostat kit, almond - single pole / double pole
CTT1P / CTT2P	Built-in tamperproof thermostat kit, white - single pole / double pole
CAMW / CAMA	Adapter plate, 18-1/2" W x 22" H, white / almond
SAMW / SAMA	Adapter plate, 12" W x 21-1/4" H, white / almond

Com-Pak Bath Series

Fan-forced Heaters

Thermostat and Timer

An integrated thermostat and timer allow you to stay in control of your temperature at all times

Built-in Overheat Protection

Includes high temperature safety shutoff for complete peace-of-mind

Quality

A strong galvanized wall can recesses into the wall and is paired with a grille that is powder-coated to remove sharp edges and provide a durable, corrosion-resistant finish



Product Dimensions (WxHxD)
9" x 12" x 4"
22.9 cm x 30.5 cm x 10.2 cm

Complete Units (includes wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CBC103TW	1000	120 / 240	8.3 / 4.2	3415	8 / 3.6
CBC132TW	500 / 800 / 1300 375 / 600 / 975	240 208	2.1 / 3.3 / 5.4 1.8 / 2.9 / 4.5	1710 / 2730 / 4440 1280 / 2050 / 3200	8 / 3.6

Heater Assemblies (requires wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CB103TW	1000	120 / 240	8.3 / 4.2	3415	4.7 / 2.1
CB132TW	500 / 800 / 1300 375 / 600 / 975	240 208	2.1 / 3.3 / 5.4 1.8 / 2.9 / 4.5	1710 / 2730 / 4440 1280 / 2050 / 3200	4.7 / 2.1

Accessories (sold separately)

Model	Description
CC CC10	Galvanized wall can, single Galvanized wall can, 10-pack
CBGW CBGW5	Grille kit, white, single Grille kit, white, 5-pack
C1TKW	Trim kit
C4TKW	Surface trim kit
CAMW	Adapter plate, 18-1/2" W x 22" H, white
SAMW	Adapter plate, 12" W x 21-1/4" H, white

Com-Pak Twin Series

Fan-forced Heaters

Thermostat

Available with or without built-in thermostat

Built-in Overheat Protection

Includes high temperature safety shutoff for complete peace-of-mind

Powerful Heating

Quickly warms large rooms and open areas, such as foyers and entryways



Complete Units (includes wall can, grille and thermostat)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CSTC302T	3000 / 2250	240 / 208	12.5 / 10.8	10240 / 7680	12 / 5.4
CST402T	4000 / 3000	240 / 208	16.7 / 14.4	13650 / 10240	12 / 5.4

Heater Assemblies (requires wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CST308*	3000	208	14.4	10240	6.5 / 2.9
CST308T	3000	208	14.4	10240	7 / 3.2
CST408*	4000	208	19.2	13650	6.5 / 2.9
CM408T	4000	208	19.2	13650	7 / 3.2
CST302*	3000 / 2250	240 / 208	12.5 / 10.8	10240 / 7680	6.5 / 2.9
CST302T	3000 / 2250	240 / 208	12.5 / 10.8	10240 / 7680	7 / 3.2
CST402*	4000 / 3000	240 / 208	16.7 / 14.4	13650 / 10240	6.5 / 2.9
CST402T	4000 / 3000	240 / 208	16.7 / 14.4	13650 / 10240	6.5 / 2.9

*Units do not have a built-in thermostat
Suffix W or A in model number designates color

Accessories (sold separately)

Model	Description
CTGW / CTGWA	Single grille - white / almond
CTC	Wall can, single
CTAMW / CTAMA	Adapter plate, 18-1/2" W x 22" H - white / almond
CTS4W / CTS4A	4" surface mount adapter - white / almond
CTT1W / CTT1A	Built-in thermostat kit, white, single pole - white / almond
CTT2W / CTT2A	Built-in thermostat kit, white, double pole - white / almond
CTT1P	Built-in tamperproof thermostat kit, single pole

Product Dimensions (WxHxD)
16-1/4" x 12" x 4"
41.3 cm x 30.5 cm x 10.2 cm

Thermostat

An integrated electronic digital thermostat allows you to stay in control of your temperature at all times and reduces up to 30% on your heating bill

Quiet

Enjoy ultra-quiet operation thanks to the variable speed fan

Quality

A strong galvanized wall can recesses into the wall and is paired with a grille that is powder-coated to remove sharp edges and provide a durable, corrosion-resistant finish



Complete Units (includes wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CEC163TW	1000 / 1600 / 1500	120 / 240 / 208	8.3 / 6.7 / 7.2	3415 / 5460 / 5120	8.1 / 3.6

Heater Assemblies (requires wall can and grille)

Model	Watts	Volts	BTU	Weight (lbs./kg)
CE083T	500 / 800 / 750	120 / 240 / 208	4.2 / 3.3 / 3.6	1710 / 2730 / 2560
CE163T	1000 / 1600 / 1500	120 / 240 / 208	8.3 / 6.7 / 7.2	3415 / 5460 / 5120

Accessories (sold separately)

Model	Description
CC	Galvanized wall can, single
CC10	Galvanized wall can, 10-pack
CCSMW	Surface mount wall can, white
CCSMB	Surface mount wall can, black
CEGW	Grille kit, white
CEGB	Grille kit, black
CAMW	Adapter plate, 18-1/2" W x 22" H, white
SAMW	Adapter plate, 12" W x 21-14" H, white

Product Dimensions (WxHxD)

9" x 12" x 4"
22.9 cm x 30.5 cm x 10.2 cm

NLW Series

Fan-forced Heaters

Quiet design

Warm up in peace and quiet with a unique fan design that reduces air turbulence and noise

Thermostat

Includes adjustable, built-in thermostat with positive "off" position

Year-round Operation

Circulate the air during the warmer months with the fan-only mode



Product Dimensions (WxHxD)
16-3/4" x 21" x 4"
42.5 cm x 53.3 cm x 10.2 cm

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
NLW208TW	2000	208	9.6	6825	16 / 7.3
NLW308TW	3000	208	14.4	10240	16 / 7.3
NLW408TW	4000	208	19.2	13650	16 / 7.3
NLW202TW	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	16 / 7.3
NLW302TW	3000 / 2250	240 / 208	12.5 / 10.8	10240 / 7680	16 / 7.3
NLW402TW	4000 / 3000	240 / 208	16.7 / 14.4	13650 / 10240	16 / 7.3
NLW452TW	4500 / 3375	240 / 208	18.8 / 16.2	15355 / 11515	16 / 7.3

Accessories (sold separately)

Model	Description
NLWC	Standard recess mount wall can
NLWC-S	Surface mount wall can

Wall can required for new installation.

Stylish and Functional

Stylish mesh screen distributes warm air gently and evenly

Compact Design

Compact design and stainless steel grille fits most bathrooms

Simple Operation

With its simple On/Off switch, the RBF is all about heat



Product Dimensions (WxHxD)
10-1/4" x 16-3/4" x 4"
26.0 cm x 42.5 cm x 10.2 cm

Model	Watts	Volts	BTU	Weight (lbs./kg)
RBF101	1000	120	3415	8 / 3.6

Accessories (sold separately)

Model	Description
RBFC	Wall can

Wall can required for new installation.

Powerful Operation

Enjoy complete warmth, thanks to a powerful air fan

Simple Installation

Pre-formed, bendable legs make mounting and installation easy

Vent-style Grille

A grille design similar to most central system air vents makes it a perfect fit for any room



Product Dimensions (WxHxD)
14" x 7-3/8" x 4"
35.6 cm x 18.7 cm x 10.2 cm

Complete Units (includes wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
RMC151W	500 / 1000 / 1500	120	4.2 / 8.3 / 12.5	1710 / 3415 / 5120	9 / 4.1
RMC208W	2000	208	9.6	6825	9 / 4.1
RMC162W	700 / 900 / 1600 525 / 675 / 1200	240 / 208	2.9 / 3.8 / 6.7 2.5 / 3.3 / 5.8	2390 / 3075 / 5460 1795 / 2305 / 4095	9 / 4.1
RMC162A	700 / 900 / 1600 525 / 675 / 1200	240 / 208	2.9 / 3.8 / 6.7 2.5 / 3.3 / 5.8	2390 / 3075 / 5460 1795 / 2305 / 4095	9 / 4.1
RCM202W	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	9 / 4.1
RMC202A	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	9 / 4.1

Heater Assemblies (requires wall can, grille and thermostat)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
RM151	500 / 1000 / 1500	120	4.2/8.3/12.5	1710 / 3415 / 5460	4.5 / 2
RM108	1000	208	4.8	3415	4.5 / 2
RM158	1500	208	7.2	5120	4.5 / 2
RM168	700 / 900 / 1600	208	3.4 / 4.3 / 7.7	2390 / 3175 / 5460	4.5 / 2
RM208	2000	208	9.6	6825	4.5 / 2
RM102	1000 / 750	240	4.2 / 3.6	3415 / 2560	4.5 / 2
RM162	700 / 900 / 1600 525 / 675 / 1200	240/208	2.9 / 3.8 / 6.7 2.5 / 3.3 / 5.8	2390 / 3075 / 5460 1795 / 2305 / 4095	4.5 / 2
RM202	2000 / 1500	240 / 20	8.3 / 7.2	6825 / 5120	4.5 / 2
RM222	2250 / 1687	240 / 208	9.4 / 8.1	7680 / 5760	4.5 / 2

See next page for accessories

Powerful Operation

Enjoy complete warmth, thanks to a powerful air fan

Simple Installation

Pre-formed, bendable legs make mounting and installation easy

Vent-style Grille

A grille design similar to most central system air vents makes it a perfect fit for any room



Accessories (sold separately)

Model	Description
RMGW	Grille kit, white, single
RMGA	Grille kit, almond, single
RMGW5	Grille kit, white, 5-pack
RMGA5	Grille kit, almond, 5-pack
RMC	Wall can, single
RMC5	Wall can, 5-pack
RMT2W	Double pole thermostat kit, white
RMT2A	Double pole thermostat kit, almond

RFI Series

Fan-forced Heaters

Fan-forced Heating


Ideal for maintaining comfort in areas subject to cold drafts such as vestibules and stairwells

Flexible Installation

All models offer recessed or surface installation, ceiling or wall mounting

Access Door

Convenient and subtle access door can be locked for tamperproof applications

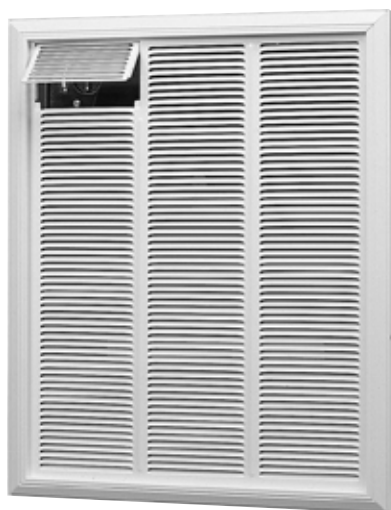

Product Dimensions (WxHxD)
16-3/4" x 21-1/2" x 5-1/4"
42.5 cm x 54.6 cm x 13.3 cm

Model	Watts	Volts	BTU	Weight (lbs./kg)
RFI815D31W	1500 / 1125	240 / 208	5118 / 3840	28 / 12.7
RFI820D31W	2000 / 1500	240 / 208	6824 / 5118	28 / 12.7
RFI830D31W	3000 / 2250	240 / 208	10236 / 7680	28 / 12.7
RFI840D21W	4000	208	13648	28 / 12.7
RFI840D31W	4000 / 3000	240 / 208	13648 / 10236	28 / 12.7
RFI848D31W	4800 / 3600	240 / 208	16378 / 12283	28 / 12.7

Accessories (sold separately)

Model	Description
RFP8DW	Surface mount box
RFITF	T-bar ceiling mount trim
RFIFPW	Front panel kit

Baseboards



Electric baseboards have been an innovation that has continued to thrive in the heating industry over decades. This traditional and efficient heating solution is here to stay, and we have a multitude of varieties from which to choose. Replace existing baseboard heaters with improved baseboard technology that you can rely on to keep your loved ones warm in the cold months. Installed out of sight, tucked away neatly on the floor and against the wall, you will almost forget your heater is there with the quiet operating features. See how the products that you have depended on for years are advancing and growing alongside you and your family.

Easy Installation


Pre-punched markings at 1-inch intervals make for simple installation

Perfect Replacement

Practical design is built to last and ideal for replacement and retrofit applications

Quiet Operation

Wiring available at either end ensure that no matter the space, hardwiring the unit can be done

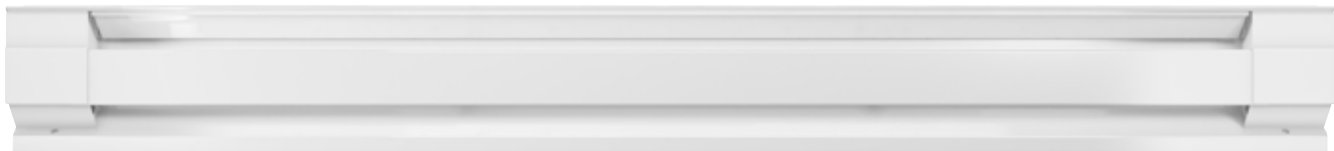

Model	Watts	Volts	Amps	BTU	Length (in/cm)	Weight (lbs./kg)
2F500-1	500	120	4.2	1710	30 / 76.2	6 / 2.7
2F750-1	750	120	6.3	2560	36 / 91.4	7 / 3.2
4F1000-1	1000	120	8.3	3415	48 / 21.8	9 / 4.1
6F1500-1	1500	120	12.5	5120	72 / 182.9	12 / 5.4
2F500-8	500	208	2.4	1710	30 / 76.2	6 / 2.7
2F750-8	750	208	3.6	2560	36 / 91.4	7 / 3.2
4F1000-8	1000	208	4.8	3415	48 / 21.8	9 / 4.1
5F1250-8	1250	208	6.0	4265	60 / 152.4	10 / 4.5
6F1500-8	1500	208	7.2	5120	72 / 182.9	12 / 5.4
8F2000-8	2000	208	9.6	6825	96 / 243.84	16 / 7.3
8F2500-8	2500	208	12.0	8530	96 / 243.84	18 / 8.2
2F350	350 / 262	240 / 208	1.5 / 1.3	1195 / 895	24 / 61.0	5 / 2.3
2F500	500 / 375	240 / 208	2.1 / 1.8	1710 / 1280	30 / 76.2	6 / 2.7
3F750	750 / 563	240 / 208	3.1 / 2.7	2560 / 1925	36 / 91.4	7 / 3.2
4F1000	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	48 / 21.8	9 / 4.1
5F1250	1250 / 937	240 / 208	5.2 / 4.5	4265 / 3200	60 / 152.4	10 / 4.5
6F1500	1500 / 1125	240 / 208	6.3 / 5.4	5120 / 3840	72 / 182.9	12 / 5.4
8F2000	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	96 / 243.84	16 / 7.3
8F2025	2500/2000 1975/1500	240 208	10.4 / 8.3 9.0 / 7.2	8530 / 6825 6400 / 5120	96 / 243.84	18 / 8.2
8F2500	2500 / 1875	240 / 208	10.4 / 9.0	8530 / 6400	96 / 243.84	18 / 8.2

Suffix W or A in model number designates color

Accessories (sold separately)

Model	Description
BTF2	Double pole built-in thermostat kit
BTF1	Single pole built-in thermostat kit
LTF240	Built-in load transfer switch kit
BRF12	Built-in receptacle plate, requires separate supply wire
BTF2TP	Double pole tamperproof built-in thermostat kit
BTF1TP	Single pole tamperproof built-in thermostat kit
BLF1	Corner Connector, inside 90°

Height x Depth
6-3/4" x 2-1/2"
17.2 cm x 6.4 cm

Portable Baseboard

Thermostat

Easily adjustable for perfect warmth with a large, dial thermostat that includes an off setting

Portable

6-foot cord with grounded plug so you can have warmth anywhere

Safe

Built-in safety tip-over switch automatically cuts power to the unit for added peace of mind



Product Dimensions (WxHxD)
49" x 7-1/2" x 5-3/8"
124.5 cm x 19.0 cm x 13.7 cm

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
4P1500W	1500	120	12.5	5120	8.5 / 4.3



Smart Design

Innovative technology with environmentally-friendly mineral oil that retains heat much longer than standard electric baseboards

Safe

Lowest surface temperatures available - perfect for homes with kids and pets

Silent, clean operation

Virtually silent operation with no plumbing required



Model	Watts	Volts	Amps	BTU	Length (in/cm)	Weight (lbs./kg)
EBHN500-1W	500	120	4.2	1710	35 / 88.9	14.9 / 6.8
EBHN750-1W	750	120	6.3	2560	47 / 119.4	18.9 / 8.6
EBHN1000-1W	1000	120	8.3	3415	59 / 149.9	22.9 / 10.4
EBHN1250-1W	1250	120	10.4	4265	71 / 180.3	26.9 / 12.2
EBHN1500-1W	1500	120	12.5	5120	83 / 210.8	30.9 / 14
EBHN500-8W	500	208	2.4	1710	35 / 88.9	13.9 / 6.3
EBHN750-8W	750	208	3.6	2560	47 / 119.4	17.9 / 8.1
EBHN1000-8W	1000	208	4.8	3415	59 / 149.9	21.9 / 9.9
EBHN1250-8W	1250	208	6.0	4265	71 / 180.3	25.9 / 11.7
EBHN1500-8W	1500	208	7.2	5120	83 / 210.8	29.9 / 13.6
EBHN500W	500 / 375	240 / 208	2.1 / 1.8	1710 / 1280	35 / 88.9	13.9 / 6.3
EBHN750W	750 / 563	240 / 208	3.1 / 2.7	2560 / 1925	47 / 119.4	17.9 / 8.1
EBHN1000W	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	59 / 149.9	21.9 / 9.9
EBHN1250W	1250 / 937	240 / 208	5.2 / 4.5	4265 / 3200	71 / 180.3	25.9 / 11.7
EBHN1500W	1500 / 1125	240 / 208	6.3 / 5.4	5120 / 3840	83 / 210.8	29.9 / 13.6

Accessories (sold separately)



Thermostat Kit

EBKNW

Height x Depth
9-1/2" x 3-1/4"
24.1 cm x 8.3 cm

Smart Design

Innovative technology with environmentally-friendly mineral oil that retains heat much longer than standard electric baseboards

Safe

Lowest surface temperatures available - perfect for homes with kids and pets

Portable

6-foot cord with grounded plug so you can have warmth anywhere



Product Dimensions (WxHxD)
59" x 9-1/2" x 6-1/2"
149.9 cm x 24.1 cm x 16.5 cm

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
EPN1500W	1500	120	12.5	5120	8.5 / 4.3



Linear Convector Baseboards

Baseboards

Compact Size

Up to 42% smaller in length than conventional baseboards

Construction

Shark-fin heating element blade design improves heat transfer, provides quiet operation and extends product life

Flexibility

Discreet styling, reduced length and added versatility of placement provide more options when designing a room



Model	Watts	Volts	BTU	Length (in/cm)	Weight (lbs./kg)
LC2005W31	500 / 375	240 / 208	1706 / 1280	20 / 50.8	3.75 / 1.7
LC2507W31	750 / 563	240 / 208	2559 / 1919	25 / 63.5	4.4 / 2.0
LC3010W31	1000 / 750	240 / 208	3412 / 2559	30 / 76.2	5 / 2.3
LC3512W31	1250 / 938	240 / 208	4265 / 3199	35 / 88.9	6.65 / 3
LC4015W31	1500 / 1125	240 / 208	5118 / 3839	40 / 101.6	7.5 / 3.2
LC5020W31	2000 / 1500	240 / 208	6824 / 5120	50 / 127.0	8.2 / 3.7
LC6025W31	2500 / 1875	240 / 208	8530 / 6398	60 / 152.4	9.7 / 4.4

Height x Depth
6-5/8" x 2-3/8"
16.9 cm x 5.9 cm

Accessories (sold separately)



Thermostat Kit

DTK-SP (Single Pole)
DTK-DP (Double Pole)

Proportional Convector Baseboards

Baseboards

Compact Size

Up to 42% smaller in length than conventional baseboards

Economical

Built-in electronic thermostat uses up to 33% less energy than conventional baseboards and thermostats

Thermostat

Built-in CONNEX receiver allows wireless temperature control with optional wall-mounted CONNEX controller



Model	Watts	Volts	BTU	Length (in/cm)	Weight (lbs./kg)
PC2005W31	500 / 375	240 / 208	1706 / 1280	20 / 50.8	4 / 1.8
PC2507W31	750 / 563	240 / 208	2559 / 1919	25 / 63.5	4.65 / 2.1
PC3010W31	1000 / 750	240 / 208	3412 / 2559	30 / 76.2	5.25 / 2.4
PC3512W31	1250 / 938	240 / 208	4265 / 3199	35 / 88.9	6.65 / 3
PC4015W31	1500 / 1125	240 / 208	5118 / 3839	40 / 101.6	7.75 / 3.5
PC5020W31	2000 / 1500	240 / 208	6824 / 5120	50 / 127.0	8.45 / 3.8
PC6025W31	2500 / 1875	240 / 208	8530 / 6398	60 / 152.4	9.95 / 4.5

Height x Depth
6-5/8" x 2-3/8"
16.9 cm x 5.9 cm

Wireless Control Options

Model	Description
DPCRWS	Single-zone CONNEX Controller
CX-MPC	Multi-zone Programmable CONNEX Controller
CX-WIFI	Wi-Fi Multi-zone Programmable CONNEX Controller



CX-MPC



CX-WIFI



DPCRWS

Panel Convectors



Warm up quickly and quietly with an electric panel convector, as it circulates hot air through the whole room. Convection heating relies on the cycle of cool air being heated inside the panel, rising, and pushing cooler air down to be heated. Choose from a series of sleek designs and innovative functions to opt into an alternative to radiators. It is easy to warm up to the idea of supplemental heat with the safe and easy-to-use Panel Convector.

Allegro II Series

Panel Convectors

Exclusive X Element

The exclusive X-shaped convection heating element paired with a low-thermal fan-forced heater maximizes efficiency

Choose Your Profile

Available in 3 profiles - low, standard and high - for more installation location flexibility.

Programmable Settings

Choose between four settings to heat your room: Comfort; Economy; Frost protection (45°F (7°C)); and Program



Allegro 14

Model	Watts	Volts	BTU	Length (in/cm)	Weight (lbs./kg)
7315-C05-FS	500 / 375	240 / 208	1706 / 1279	19-1/4 / 48.9	9.6 / 4.4
7315-C10-FS	1000 / 750	240 / 208	3412 / 2559	25-1/2 / 64.9	11.9 / 5.4
7315-C15-FS	1500 / 1125	240 / 208	5118 / 3838	33-3/8 / 84.9	15 / 6.8
7315-C20-FS	2000 / 1500	240 / 208	6824 / 5118	44-1/2 / 112.9	18.8 / 8.5

Height x Depth
14-1/8" x 4"
36.0 cm x 10.0 cm



Allegro 18

Model	Watts	Volts	BTU	Length (in/cm)	Weight (lbs./kg)
7316-C05-FS	500 / 375	240 / 208	1706 / 1279	16-1/8 / 40.9	10.6 / 4.8
7316-C10-FS	1000 / 750	240 / 208	3412 / 2559	19-1/4 / 48.9	11.2 / 5.1
7316-C15-FS	1500 / 1125	240 / 208	5118 / 3838	25-1/2 / 64.9	13.7 / 6.2
7316-C20-FS	2000 / 1500	240 / 208	6824 / 5118	33-3/8 / 84.9	16.8 / 7.6

Height x Depth
18-1/2" x 4-3/8"
47.0 cm x 11.0 cm



Allegro 26

Model	Watts	Volts	BTU	Length (in/cm)	Weight (lbs./kg)
7317-C05-FS	500 / 375	240 / 208	1706 / 1279	13 / 32.9	12.4 / 5.6
7317-C10-FS	1000 / 750	240 / 208	3412 / 2559	16-1/8 / 40.9	14.2 / 6.4
7317-C15-FS	1500 / 1125	240 / 208	5118 / 3838	22-3/8 / 56.9	17.6 / 8
7317-C20-FS	2000 / 1500	240 / 208	6824 / 5118	30-1/4 / 76.9	22.9 / 10.4

Height x Depth
26-3/4" x 4-3/4"
68.0 cm x 12.0 cm

Apéro Series

Panel Convectors

Efficient Heating

Designed to create a comfortable space, the air circulates gently and continuously in perfect silence while warming the room

Slim Design

The heater only takes up a small amount of space in your home without compromising on comfort

Thermostat

Built-in electronic thermostat means no need to install a wall thermostat when adding heat to a room with a central system



Model	Color	Watts	Volts	BTU	Length (in/cm)	Weight (lbs./kg)
7360-C05-BB	White	500 / 375	240 / 208	1706	13-1/4 / 34	6.9 / 3.1
7360-C07-BB 7360-C07-HS	White Charcoal	750 / 565	240 / 208	2559	13-1/4 / 34	7.2 / 3.3
7360-C10-BB 7360-C10-HS	White Charcoal	1000 / 750	240 / 208	3412	16-1/2 / 42	8.1 / 3.7
7360-C12-BB	White	1250 / 940	240 / 208	4265	19-5/8 / 50	9.1 / 4.1
7360-C15-BB 7360-C15-HS	White Charcoal	1500 / 1125	240 / 208	5118	22-7/8 / 58	10.7 / 4.8
7360-C17-BB	White	1750 / 1315	240 / 208	5971	26 / 66	11.7 / 5.3
7360-C20-BB 7360-C20-HS	White Charcoal	2000 / 1500	240 / 208	6824	29-1/8 / 74	13.1 / 5.9
7360-C28-BB	White	2000	208	6824	29-1/8 / 74	13.1 / 5.9

Height x Depth
17-1/4" x 3-7/8"
44.5 cm x 10 cm

Plug-in

Model	Color	Watts	Volts	BTU	Length (in/cm)	Weight (lbs./kg)
7358-B05-FS	White	500	120	1706	13-3/8 / 34	7.5 / 3.4
7358-B12-FS	White	1250	120	4265	26 / 66	13 / 5.9

Height x Depth
17-3/4" x 4"
45 cm x 10.2 cm

Specialty



Browse through a variety of specialty heaters for spaces less commonly thought of, but just as well used. Whether you are keeping equipment from freezing overnight or looking for some warmth on your toes in the morning, our selection of specialty heaters has you covered. We have frost protection/pumphouse, ceiling mounted, under-cabinet, garage and workshop heaters – for those hard-to-fit places that need heat too. There is no thinking twice about keeping warm this season with our wide selection of specialty heaters.

Under Cabinet Heater

Specialty

Powerful Heat

Greater range of flexible installation with multi-volt and watt capabilities

Discreet

Provides the heat you need with its finned tubular element and fits safely in your cabinet toe kick area

Versatile

Ideal as both a primary heat source for smaller rooms, or as a complementary heating source in large, open living areas

**Coming
Summer 2021**



Model	Description	Watts	Volts	Amps	BTU	Weight (lbs./kg)
UCH183 (Cadet)	Complete unit, no thermostat	450 / 900 / 1350 / 1800 900 / 1800 675 / 1350	120 240 208	3.8 / 7.5 / 11.3 / 15 3.8 / 7.5 3.2 / 6.5	1535 / 3075 / 4610 / 6145 3075 / 6145 4610 / 6145	12.3 / 5.6
DUCH183 (Dimplex)	Complete unit, no thermostat	450 / 900 / 1350 / 1800 900 / 1800 675 / 1350	120 240 208	3.8 / 7.5 / 11.3 / 15 3.8 / 7.5 3.2 / 6.5	1535 / 3075 / 4610 / 6145 3075 / 6145 4610 / 6145	12.3 / 5.6



Product Dimensions (WxHxD)
21-1/4" x 3-3/4" x 11"
54 cm x 9.5 cm x 28.0 cm

Includes two grilles, black and white

Accessories (sold separately)



**UCHT (Cadet)
DUCHT (Dimplex)**
Thermostat Kit

Pump House Heater

Specialty

Frost Protection

Ideal solution for moist or cold environments where equipment needs to stay above freezing

Safe

Built-in safety shutoff makes it perfect for low-clearance locations like crawlspaces

Thermostat

Built-in adjustable thermostat with freeze protection setting and additional no heat setting



Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
FP051TB	500	120	4.2	1710	8 / 3.6
FP052TB	500 / 375	240 / 208	2.1 / 1.8	1710 / 1280	8 / 3.6
FP102TB	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	9.5 / 4.3

Product Dimensions (WxHxD)
28-1/2" x 4" x 6-1/2"
71.4 cm x 10.2 cm x 16.5 cm

Radiant Cove Heater

Specialty

Radiant Heating

Comfortably heats people and objects first, then gradually heats room air

Space-saving

Installs above doors or windows to save wall space and floor space for optimal room layout options

Quiet Operation

Heating element construction that prevents noise when opening



Model	Watts	Volts	Amps	BTU	Length (in/cm)	Weight (lbs./kg)	Accessories (sold separately)	
							Model	Description
CORC0602W	600	120	5.0	2050	47 / 119.4	3.75 / 1.7	KIT-CORC-TB6	Single pole built-in thermostat kit
CORC0752W	750	120	6.3	2560	59 / 149.9	10 / 4.5	KIT-CORC-TB26	Double pole built-in thermostat kit
CORC0902W	900	120	7.5	3075	71 / 180.3	12 / 5.4	KIT-CORC-JT	Splice plate, end-to-end installation
CORC1052W	1050	120	8.8	3585	83 / 210.8	13 / 5.9		
CORC1202W	1200	120	10.0	4095	94 / 238.8	15 / 6.8		
CORC1502W	1500	120	12.5	5120	113 / 287	18 / 8.2		
CORC0608W	600	208	2.9	2050	47 / 119.4	3.75 / 1.7		
CORC0758W	750	208	3.6	2560	59 / 149.9	10 / 4.5		
CORC0908W	900	208	4.3	3075	71 / 180.3	12 / 5.4		
CORC1058W	1050	208	5.0	3585	83 / 210.8	13 / 5.9		
CORC1208W	1200	208	5.8	4095	94 / 238.8	15 / 6.8		
CORC1508W	1500	208	7.2	5120	113 / 287	18 / 8.2		
CORC0600W	600	240	2.5	2050	47 / 119.4	3.75 / 1.7		
CORC0750W	750	240	3.1	2560	59 / 149.9	10 / 4.5		
CORC0900W	900	240	3.8	3075	71 / 180.3	12 / 5.4		
CORC1050W	1050	240	4.4	3585	83 / 210.8	13 / 5.9		
CORC1200W	1200	240	5.0	4095	94 / 238.8	15 / 6.8		
CORC1500W	1500	240	6.3	5120	113 / 287	18 / 8.2		

Ceiling-mounted Heaters

Specialty

Ease of Installation


Ceiling installation reduces potential for damage

Economical

Efficiently circulates air and directs heat downward

Thermostat

Built-in thermostat included

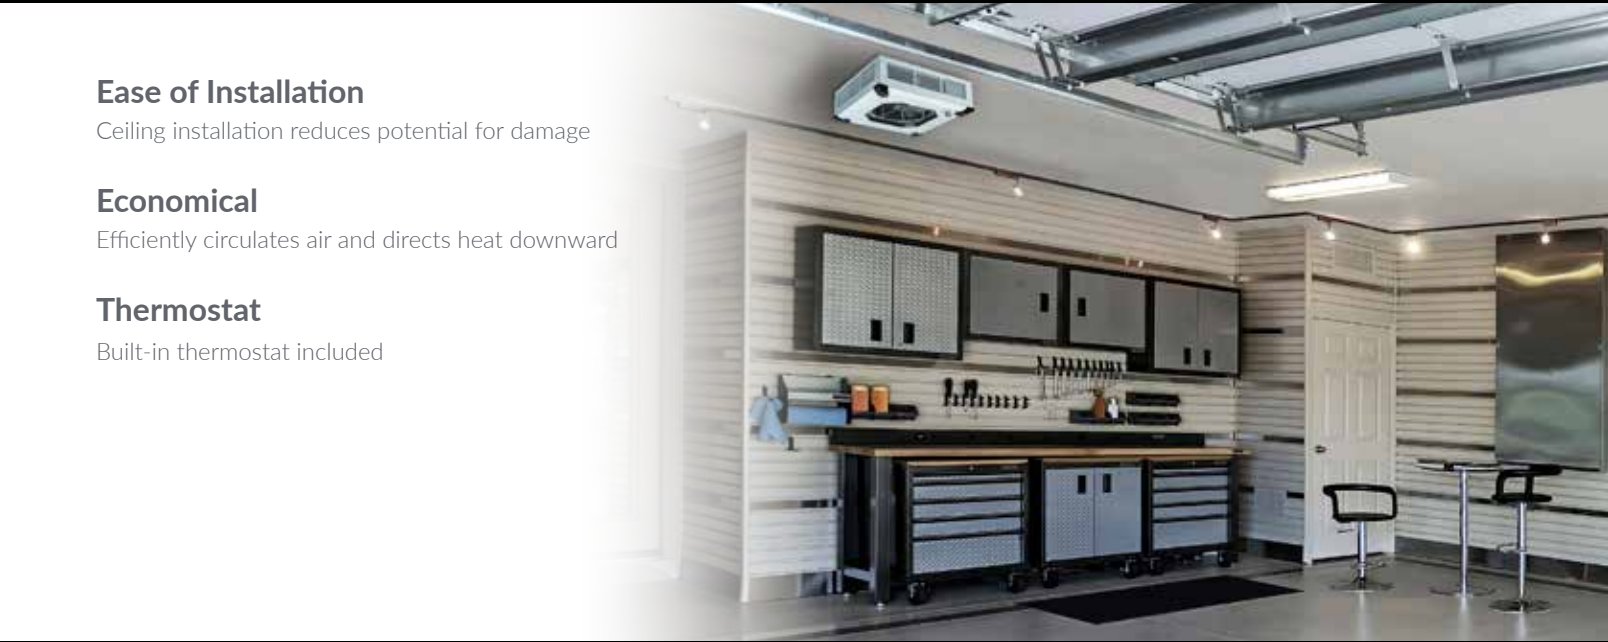

RCH5031CXW



RCH5031W

Model	Watts	Volts	CFM	Weight (lbs./kg)
RCH5031CXW	5000	240	150	20 / 9.1
RCH5031W	5000	240	150	18.2 / 8.25

Product Dimensions (WxHxD)
16" x 5-1/4" x 16"
40.6 cm x 13.3 cm x 40.6 cm



Single-zone
Controller

DPCRWS

Included with RCH5031CXW

Industrial Unit Heater

Specialty

Supplemental Heating

Ideal for retrofit or new construction, the EUH series are perfect for hard-to-heat areas

Direct Wire

Requires direct wiring for an ideal and seamless installation

Thermostat

Built-in adjustable thermostat on all models



Product Dimensions (WxHxD)
13" x 19-1/2" x 13-3/8"
33 cm x 49.5 cm x 34 cm

Model	Watts	Volts	BTU	Weight (lbs./kg)
EUH03B11T	2000	120	10236	36 / 16
EUH03B24CT	2000	240	10236	36 / 16
EUH03B31T	3000 / 2300	240 / 208	10236 / 7677	36 / 16
EUH03B34CT	3000 / 2300	240 / 208	10236 / 7677	36 / 16
EUH03B73CT	3000	480	10236	40 / 18
EUH03B81CT	3000	600	10236	40 / 18
EUH05B24CT	5000	208	17060	36 / 16
EUH05B31T	5000 / 3800	240 / 208	17060 / 12795	36 / 16
EUH05B34CT	5000 / 3800	240 / 208	17060 / 12795	36 / 16
EUH05B74CT	5000	480	17060	40 / 18
EUH05B84CT	5000	600	17060	40 / 18
EUH08B24CT	7500	208	25590	46 / 21
EUH08B34CT	7500 / 5600	240 / 208	25590 / 19193	46 / 21
EUH08B74CT	7500	480	25590	50 / 22
EUH08B84CT	7500	600	25590	50 / 22
EUH10B24CT	10000	208	34120	46 / 21
EUH10B34CT	10000 / 7500	240 / 208	34120 / 25590	46 / 21
EUH10B74CT	10000	480	34120	50 / 22
EUH10B84CT	10000	600	34120	50 / 22

Note: T = Built-in thermostat, CT = Built-in thermostat and contactor

Accessories (sold separately)

Model	Description
EUHWB	Wall hanger bracket

Garage/Workshop Heater

Specialty

Powerful Heating

Powerful fan and 4000 watt stainless steel heater element, accurately balanced and correctly pitched to optimize performance

Versatile Mounting

Versatile mounting bracket attaches to wall or ceiling – heater swivels to direct heat

Temperature Control

Automatic temperature control helps maintain consistent temperature from 7-25°C (45-77°F)



Model	Watts	Volts	BTU	CFM	Weight (lbs./kg)
DGWH4031G (Dimplex)	4000	240	13648	300	10 / 4.5
CGWH4031G (Cadet)	4000	240	13648	300	10 / 4.5



Product Dimensions (WxHxD)
9" x 11" x 7-1/2"
22.9 cm x 27.9 cm x 19.1 cm

CUH

- Powerful heat output up to 5000W (240V)
- Adjustable louvers direct warm air where needed
- Built-in single-pole thermostat for accurate temperature control
- Requires direct wiring for an ideal and seamless installation

DCH & EMC

- 300 CFM delivers powerful heat output
- Thermal overheat protection stops heater from running if it gets too hot
- Includes 6 foot cord with NEMA standard plug (6-20P or 6-30P)
- Built-in single-pole thermostat for accurate temperature control



CUH05B31TG



DCH4831LG



EMC4240G

Model	Description	Watts	Volts	BTU	CFM	Product Dimensions (WxHxD)	Weight (lbs./kg)
CUH05B31TG	Compact Unit Heater	5000 / 3750	240 / 208	17060 / 12795	300	9" x 11" x 9" 22.9 cm x 27.9 cm x 22.9	10 / 4.5
DCH4831LG	Portable Construction Heater	4800	240	16377	300	9" x 11" x 7-1/2" 22.9 cm x 27.9 cm x 19.1 cm	10.9 / 4.95
EMC4240G	Enclosed Motor Construction Heater	4800	240	16377	300	9" x 11" x 7-1/2" 22.9 cm x 27.9 cm x 19.1 cm	10.9 / 4.95

Thermostats

Thermostats



TEN252DW*
TEN362DW*



TEP302DW*
TEP362DW*



TEN402DW*



T521-W
T522-W



T521-A
T522-A



TH401



TH114-A-240D-B*



TH115-A-240D-B*

Thermostats

Model	Description	Temperature Range (°F / °C)	Watts	Volts	Amps
TEN252DW*	Non-programmable double pole electronic thermostat	41-86 / 5-30	1250 / 2163 / 2500	120 / 208 / 240	10.4
TEN362DW*	Non-programmable double pole electronic thermostat	41-86 / 5-30	1800 / 3120 / 3600	120 / 208 / 240	15
TEP302DW*	Programmable double pole electronic thermostat	41-86 / 5-30	1500 / 2600 / 3000	120 / 208 / 240	12.5
TEP362DW*	Programmable double pole electronic thermostat	41-86 / 5-30	1800 / 3120 / 3600	120 / 208 / 240	15
TEP402DW*	Programmable double pole electronic thermostat	41-86 / 5-30	2000 / 3467 / 4000	120 / 208 / 240	16.7
T521-W	Single pole mechanical thermostat, white	50-90 / 10-30	2640 / 4576 / 5280	120 / 208 / 240	22
T521-A	Single pole mechanical thermostat, almond	50-90 / 10-30	2640 / 4576 / 5280	120 / 208 / 240	22
T522-W	Double pole mechanical thermostat, white	50-90 / 10-30	2640 / 4576 / 5280	120 / 208 / 240	22
T522-A	Double pole mechanical thermostat, almond	50-90 / 10-30	2640 / 4576 / 5280	120 / 208 / 240	22
TH401	Non-programmable single-pole electronic thermostat	40-85 / 5-30	1250 / 2163 / 2500	120 / 208 / 240	10.4

Controllers

Model	Description	Temperature Range (°F / °C)	Watts	Volts	Amps
TH114-A-240D-B*	Non-programmable double pole electronic controller	40-85 / 5-30	3600	208 / 240	15
TH115-A-240D-B*	Programmable double pole electronic thermostat	40-85 / 5-30	3600	208 / 240	15

*Available to select customers only

Thermostats

Thermostats



TS321W
TD322W



CX-MPC



CX-WIFI



Wi-Fi



DPCRWS



Thermostats

Model	Description	Temperature Range (°F / °C)	Rating (Non-inductive / Inductive)
TS321W	Single pole mechanical thermostat	41-95 / 5-35	5000 W/277 V Max / 1/3HP/240V
TD322W	Double pole mechanical thermostat	41-95 / 5-35	5000 W/277 V Max / 1/3HP/240V

Controllers

Model	Description	Temperature Range (°F / °C)	Volts
CX-MPC	CONNEX® multi-zone programmable controller	32-86 / 0-30	3 (batteries included)
CX-WIFI	CONNEX® multi-zone Wi-Fi programmable controller	32-86 / 0-30	3 (batteries included)
DPCRWS	CONNEX® single-zone controller	32-86 / 0-30	3 (batteries included)

Outdoor Heat



Radiant heating is perfect for homeowners, business owners, landlords, designers or builders looking to enhance an outdoor entertaining space with a premium comfort product that is complimentary to modern design. There are three ways to install an IR heater from Dimplex: hang it on the wall; hang it from the ceiling; or attach it to a floor stand. All units must be hardwired and are protected from tough natural elements for long-lasting durability. Stay warm during any season with radiant heat.

DLW Outdoor/Indoor Radiant Series

Outdoor Heat

Effective Radiant Heat

Warms like the sun, heating people and objects with zero glare

Elegant Design

Slim profile is perfect for ceiling and wall-mount applications

Long-wave Radiant Technology

No red glow means you can enjoy in low-light settings

Coming
Summer 2021



Model	Color	Watts	Volts	Length (in/cm)	Weight (lbs./kg)
DLW1500B12	Black	1500	120	36 / 91.4	11 / 5
DLW1500W12	White	1500	120	36 / 91.4	11 / 5
DLW2400B24	Black	2400	240	53-1/2 / 135.9	17.5 / 7.9
DLW2400W24	White	2400	240	53-1/2 / 135.9	17.5 / 7.9
DLW3200B24	Black	3200	240	70 / 177.8	22 / 10
DLW3200W24	White	3200	240	70 / 177.8	22 / 10

Height x Depth
6-1/2" x 5-5/8"
16.5 cm x 14.2

Accessories (sold separately)

Model	Description
DLWAC12SIL	12" extension mounting pole
DLWAC24SIL	24" extension mounting pole
DLWAC36SIL	36" extension mounting pole
DLWAC48SIL	48" extension mounting pole

For ceiling-mount installations only



DIR Outdoor/Indoor Infrared Series

Outdoor Heat

Nextrema® Schott

Nextrema Schott glass ensures even heat distribution and minimizes light emissions.

Ease of Operation

Programmable timer with remote control, features safety shutoff after 8 hours of continuous operation.

Outdoor Rated

Water/dust tight IP65 rating for outdoor applications.



Model	Watts	Volts	Length (in/cm)	Weight (lbs./kg)
DIR15A10GR	1500	120	35-1/2 / 90.1	13.4 / 6.1
DIR18A10GR	1800	240	35-1/2 / 90.1	13.4 / 6.1
DIR22A10GR	2200	240	35-1/2 / 90.1	13.4 / 6.1

Height x Depth
6-3/4" x 3"
17.1 cm x 7.6 cm



Model	Watts	Volts	Length (in/cm)	Weight (lbs./kg)
DIR30A10GR	3000	240	50-5/8 / 128.6	18.4 / 8.4

Height x Depth
6-3/4" x 5"
17.1 cm x 12.8 cm

DIRP Plug-in Outdoor/Indoor Infrared Heater **Outdoor Heat**

Same great features as the DIR series... with more!

Innovative Design

Ensures a safe, easy and space-saving installation

On-screen Display

Shows power setting and timer function at a glance

Just Plug It In

7.7 ft. (2.3 m) cord with grounded plug,
standard 120V outlet

**Coming
Summer 2021**



Model	Watts	Volts	Length (in/cm)	Weight (lbs./kg)
DIRP15A10GR	1500	120	35-1/2 / 90.2	7 / 3.2

Height x Depth
10-7/8" x 11-3/4"
27.6 cm x 90.2 cm

DSH Heater

Outdoor Heat

Infrared Heating

Provides premium comfort by reaching maximum heat in less than 3 seconds

Ease of Operation

Programmable timer with remote control, features safety shutoff after 8 hours of continuous operation

Outdoor Rated

Water/dust tight IP65 rating for outdoor applications



Product Dimensions (WxHxD)
23-1/2" x 6" x 12-7/8"
59.6 cm x 15.4 cm x 32.6 cm

Model	Watts	Volts	BTU	Weight (lbs./kg)
DSH20W	2000	240	1710	11.7 / 5.3

Accessories (sold separately)



DGR Outdoor Infrared Propane & Gas Heaters Outdoor Heat

Infrared Heat

Heat on demand - where and when you need it

Built with Quality

Durable stainless steel construction

Safe Design


Advanced safety features including wind protection



DGR32PLP
Outdoor Portable
Propane Heater

Product Dimensions (WxHxD)
26-3/4" x 87-1/2" x 27"
68.0 cm x 222.2 cm x 69.0 cm

BTU
31, 500

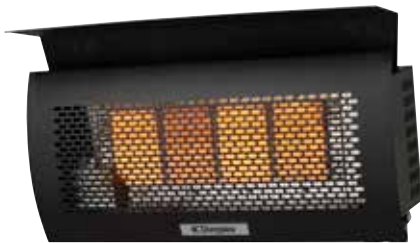

DGR32WNG
Outdoor Wall-mounted
Natural Gas Heater

Product Dimensions (WxHxD)
25-1/2" x 16" x 12-1/2"
64.8 cm x 40.6 cm x 31.8 cm

BTU
31, 500

Accessories (sold separately)

Model	Description
DGRSHIELD	Protective heat shield
DGRPOLE-WM	Ceiling-mount bracket
TGHCOVER	Protective cover



DGRSHIELD



DGRPOLE-WM



TGHCOVER

Apex72

Model	Part
HW051	65316
HW101	65314
HW151	65315
HW052	65305
HW082	65304
HW102	65303
HW132	65302
HW038	65313
HW058	65312
HW078	65311
HW108	65310
HW128	65309
HW168	65308
HW162	65301
CC / CC10	67061 / 67060
CCSMW / CCSMB	69111 / 69110
ACL / ACL5	67129 / 67132
ACH / ACH5	67130 / 67132
OR / OR10	67051 / 67050

NLW

Model	Part
NLW208TW	79208
NLW308TW	79209
NLW408TW	79210
NLW202TW	79200
NLW302TW	79201
NLW402TW	79202
NLW452TW	79203
NLWC	79214
NLWC-S	79215

Energy Plus

Model	Part
CEC163TW	65215
CE083T	65203
CE163T	65204
CC / CC10	67061 / 67060
CCSMW / CCSMB	69111 / 69110
CEGW / CEGB	65252 / 65251
CAMW	67105
SAMW	SAMW

Com-Pak

Model	Part
CSC101TW / CSC101TA	67508 / 67580
CSC151TW / CSC151TA	67509 / 67581
CSC102TW / CSC102TA	67505 / 67577
CSC152TW / CSC152TA	67506 / 67578
CSC202TW / CSC202TA	67507 / 67579
CSC101W / CSC101A	67549 / 67503
CSC151W / CSC151A	67533 / 67504
CSC072W / CSC072A	67540 / 67535
CSC102W / CSC102A	67541 / 67536
CSC152W / CSC152A	67543 / 67553
CSC202W / CSC202A	67544 / 67539
CS051 / CS051T	67550 / 67560
CS101 / CS101T	67515 / 67523
CS151 / CS151T	67516 / 67524
CS058 / CS058T	67563 / 67573
CS078 / CS078T	67564 / 67589
CS108 / CS108T	67557 / 67586
CS118 / CS118T	67569 / 67598
CS158 / CS158T	67571 / 67599
CS208 / CS208T	67517 / 67525
CS052 / CS052T	67584 / 67585
CS072 / CS072T	67510 / 67518
CS102 / CS102T	67511 / 67519
CS122 / CS122T	67512 / 67520
CS152 / CS152T	67513 / 67521
CS202 / CS202T	67514 / 67522
CTT1W / CTT1A	67063 / 67065
CTT2W / CTT2A	67064 / 67066
CTT1P / CTT2	67067 / 67068
CC / CC10	67061 / 67060
CCSMB / CCSMW / CCSMA	69110 / 69111 / 69112
CGW / CGW10	67079 / 67081
CGA / CGA10	67075 / 67080
CGB / CGB10	67082 / 68083
CMGW / CMGW5	65005 / 65006
CMGA / CMGA5	65015 / 65016
CAMW / CAMA	67105 / 67100
SAMW / SAMA	67115 / 67110

RBF

Model	Part
RBF101	79241
RBFC	79243

Com-Pak Max

Model	Part
CM158	65037
CM198 / CM198T	65033 / 65034
CM152 / CM152T	65035 / 65036
CM192 / CM192T	65031 / 65032
CTT1W / CTT1A	67063 / 67065
CTT2W / CTT2A	67064 / 67066
CTT1P / CTT2	67067 / 67068
CC / CC10	67061 / 67060
CCSMB / CCSMW / CCSMA	69110 / 69111 / 69112
CGW / CGW10	67079 / 67081
CGA / CGA10	67075 / 67080
CGB / CGB10	67082 / 68083
CMGW / CMGW5	65005 / 65006
CMGA / CMGA5	65015 / 65016
CAMW / CAMA	67105 / 67100
SAMW / SAMA	67115 / 67110

Com-Pak Bath

Model	Part
CBC103TW	65101
CBC132TW	65105
CB103T	65103
CB132T	65104
CC / CC10	67061 / 67060
CBGW / CBGW5	65110 / 65140
C1TKW	67091
C4TKW	67094
CAMW	67105
SAMW	SAMW
CTT1P / CTT2	67067 / 67068

Com-Pak Twin

Model	Part
CSTC302TW / CSTC302TW	67526 / 67582
CSTC402TW / CSTC402TA	65105 / 67583
CST308 / CST308T	67574 / 67534
CST408 / CST408T	67530 / 67533
CST302 / CST302T	67528 / 67531
CST402 / CST402T	67529 / 67532
CTGW / CTGA	67089 / 67090
CTAMW / CTAMA	68075 / 68070
CTS4W / CTS4A	69104 / 69100
CTT1W / CTT1A	67063 / 67065
CTT2W / CTT2A	67064 / 67066
CTT1P	67067

Register

Model	Part
RMC151W	63315
RMC208W	63316
RMC162W	63314
RMC162A	63317
RMC202W	63313
RMC202A	63318
RM151	00308
RM108	00310
RM158	00323
RM168	00313
RM208	00309
RM102	00311
RM202	00306
RM222	00322
RMGW / RMGB	00275 / 00276
RMGW5 / RMGA5	63113 / 63114
RMC / RMC5	63115 / 63116
RMT2W / RMT2A	63123 / 63124

SoftHEAT

Model	Part
EBHN500-1W	13411
EBHN750-1W	13412
EBHN1000-1W	13413
EBHN1250-1W	13414
EBHN1500-1W	13415
EBHN500-8W	13462
EBHN750-8W	13463
EBHN1000-8W	13464
EBHN1250-8W	13465
EBHN1500-8W	13466
EBHN500W	13457
EBHN750W	09950
EBHN1000W	13459
EBHN1250W	13460
EBHN1500W	13461
EBKN	13170

SoftHEAT Portable

Model	Part
EPN1500W	13469

F Series Baseboard

Model	Part
2F500-1W / 2F500-1A	05530 / 05520
3F750-1W / 3F750-1A	05532 / 05522
4F1000-1W / 4F1000-1A	05534 / 05524
6F1500-1W / 6F1500-1A	05536 / 05526
2F500-8W / 2F500-8A	11924 / 11918
3F750-8W / 3F750-8A	11934 / 11938
4F1000-8W / 4F1000-8A	11944 / 11948
5F1250-8W / 5F1250-8A	11954 / 11958
6F1500-8W / 6F1500-8A	11964 / 11968
8F2000-8W / 8F200-8A	10924 / 11990
8F2500-8W / 8F2500-8A	03360 / 03358
2F350W / 2F350A	09949 / 06501
2F500W / 2F500A	09950 / 06502
3F750W / 3F750A	09952 / 06508
4F1000W / 4F1000A	09954 / 06509
5F1250W / 5F1250A	09955 / 06510
6F1500W / 6F1500A	09956 / 06511
8F2000W / 8F2000A	09958 / 06513
8F2025W / 8F2025A	09960 / 06515
8F2500W / 8F2500A	03360 / 03358
CSC152W / CSC152A	67543 / 67553
CSC202W / CSC202A	67544 / 67539
BTF2W / BTF2A	14925 / 14920
BTF1W / BTF1A	14915 / 14910
LTF240W / LTF240A	14963 / 14960
BRF12W / BRF12A	14902 / 14900
BTF1TPW / BTF1TA	14932 / 14930
BTF2TPW / BTF2TPA	14942 / 14940
BLF1W / BLF1A	14971 / 14970

Portable Baseboard

Model	Part
4P1500W	05601

Under Cabinet Heater

Model	Part
UCH183	10051
UCHT	66051

Cove Heater

Model	Part
CORC0602W	80012
CORC0752W	80013
CORC0902W	80014
CORC1052W	80015
CORC1202W	80016
CORC1502W	80017
CORC0608W	80082
CORC0758W	80083
CORC0908W	80084
CORC1058W	80085
CORC1208W	80086
CORC1508W	80087
CORC0600W	80022
CORC0750W	80023
CORC0900W	80024
CORC1050W	80025
CORC1200W	80026
CORC1500W	80027
KIT-CORC-TB6	80001
KIT-CORC-TB26	80002
KIT-CORC-JT	80003

Pump House Heater

Model	Part
FP051TB	30101
FP052TB	30102
FP102TB	30103

Thermostats & Controllers

Model	Part
TEP302DW	08203
TEP362DW	08204
TEN252DW	08201
TEN362DW	08202
TEP402DW	08205
T521-W	72865
T521-A	72832
T522-W	72866
T522-A	08401
TH401	72838
TH114-A-240D-B	08162
TH115-A-240D-B	08165

